

# STRIP LED



LX-ST-DS560-12V-10mm


<b>IP</b> 20/65	<b>CRI</b> 80	<b>DC12V</b>
--------------------	------------------	--------------



## STRIP LED

Supply 12V, 60 Pixels/m, single color individual control SPI strip LED built into IC, and IC has break point transmission function controllers which support UCS19\*\*, UCS29\*\*, TM18\*\*, SM167\*\*, WS28\*\*, GS82\*\*, SK6812, DM613P are recommended.

Ta: -20~40° C ; Tc=75° (max)

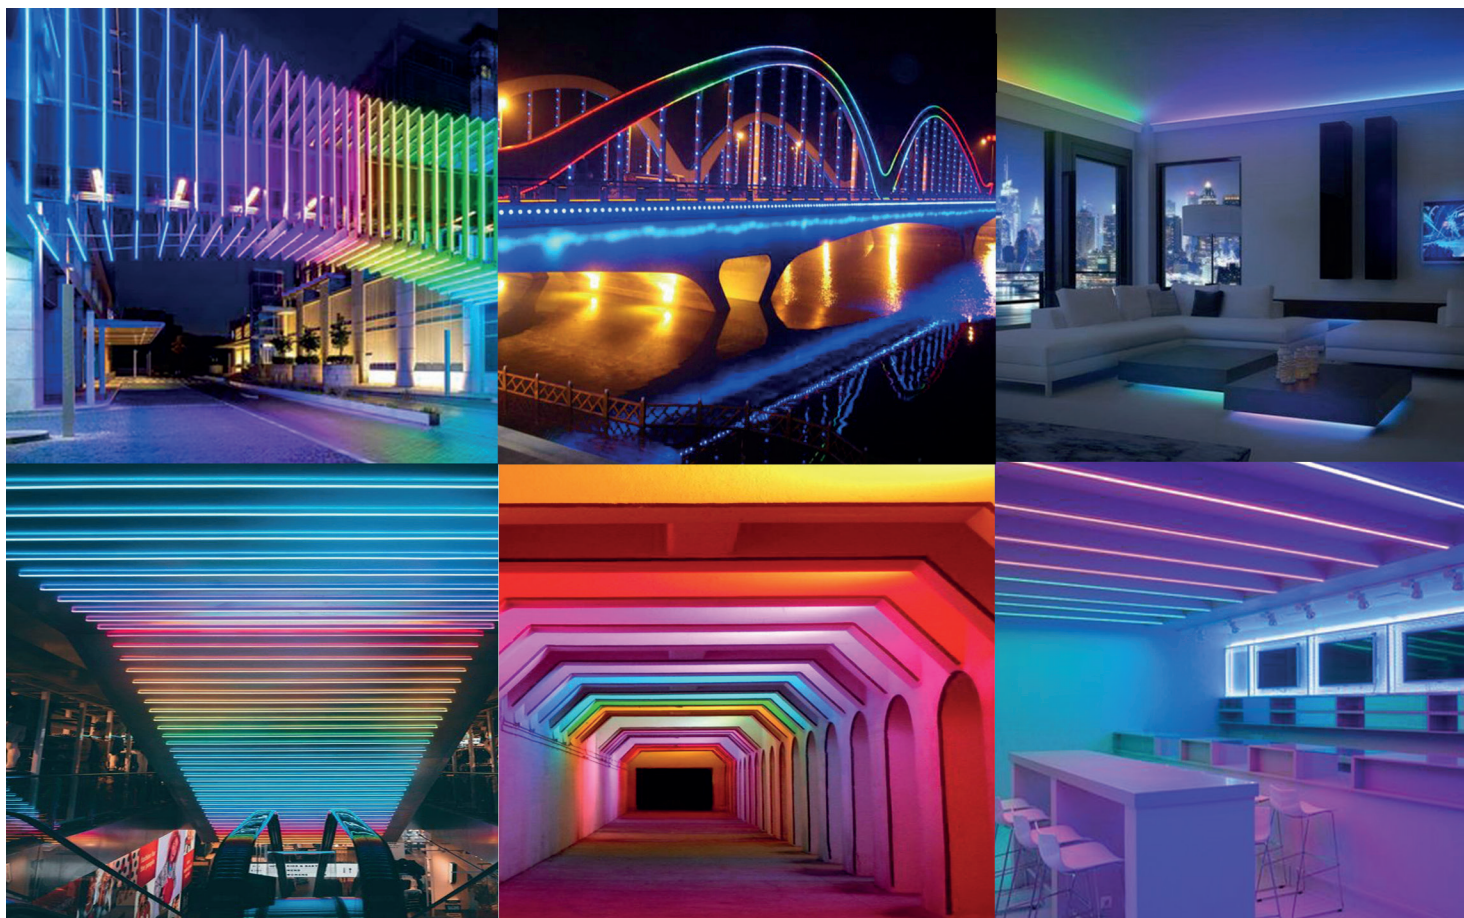



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Max Power	Luminous flux	CCT/K	IP Rating	Dimensions
LX-ST-DS560-12V -10mm	8.4W(1m) /33.6W(5m)	9.3W	920Lm	2700K	IP20/IP65	5000×10×2.1mm
			1900Lm	3600K		

## Accessories Information

Name	Picture	Code	Description
Fixed Clip		LX-94-02-00-0018	10mm width IP20
Silicone end cap set		LX-94-02-00-0022	including end cap and plug,suitable for 10mm FPC,EH/ET/EF silicone extrusion strip
Controller		LX-23-01-00-0048	Suit for SPI and DMX strip With 1 port 1024 pixels for SPI 512 pixels for DMX
Controller		LX-23-01-00-0049	Suit for SPI and DMX strip With 4 ports 4*1024pixels for SPI 4*512 pixels for DMX
Controller		LX-23-01-00-0050	Suit for SPI and DMX strip With 8 ports 8*1024pixels for SPI 8*512 pixels for DMX

## Dimensions

