


# STRIP LED



LX-ST-FD128-24V-8mm

IP 20/65 CRI >80 DC24V

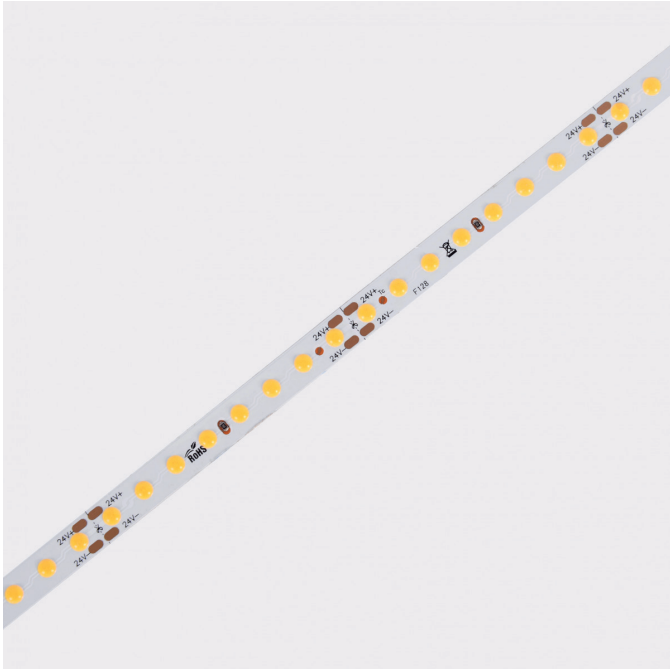

## STRIP LED

Chip strip, 180° emitting, excellent anti-sulfide ability

Reel to reel process, without soldering joint, high cost effective

CRI > 80, 120LM/W

4 optional 2700K/3000K/4000K/6500K white lights








luxio  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Max Power	Luminous flux	CCT/K	IP Rating	Dimensions
LX-ST-FD128-24V -8mm	8.8W(1m) 31.7W( 5m)	9.6W(1m)	940Lm	2700K	IP20/IP65	5000×8×1.2mm
			980Lm	3000K		
			1040Lm	4000K		
			1080Lm	6500K		

## Accessories Information

Name	Picture	Code	description
Fixed Clip		LX-94-02-00-0002	Silicone clip, screw:PA 3*8mm suitable for 8mm FPC,IP67 waterproof strip
Slim connector		LX-94-03-00-0065	TSC-08-2, suitable for 8mm fpc to fpc connection , IP20, 2pin, 10pcs per bag
FPC with wire		LX-94-03-00-0066	wire connection when using together with TSC-08-2,IP20,2PIN, 10PCS per bag
Hole plug		LX-94-03-00-0069	Silicone end cap without hole,suitable for 8mm PFC, IP65 IP67 waterproof LED strip
Stopper glue		LX-94-16-03010001	Silicone gel,suitable for IP65 and IP67 LED strip

## Dimensions

