


STRIP LED

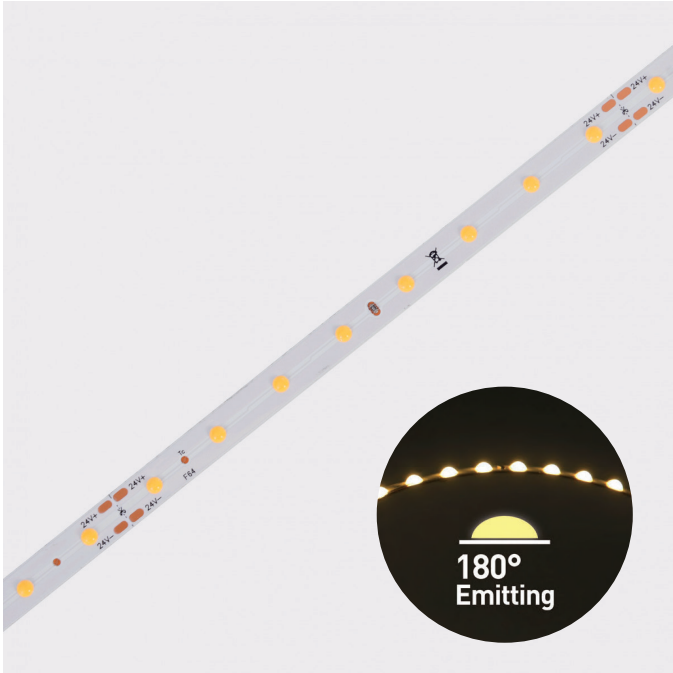

LX-ST-FD64-24V-8mm

IP
20/65

CRI
>80

DC24V



STRIP LED

Chip strip, 180° emitting, excellent anti-sulfide ability

Reel to reel process, without soldering joint, high cost effective

CRI > 80, 120LM/W

4 optional 2700K/3000K/4000K/6500K white lights





luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Max Power	Luminous flux	CCT/K	IP Rating	Dimensions
LX-ST-FD64-24V -8mm	4.4W(1m) 18.6W(5m)	4.8W(1m)	470Lm	2700k	IP20/IP65	5000×8×1.2mm
			490Lm	3000K		
			520Lm	4000K		
			540Lm	6500K		

Accessories Information

Image	Code	Description
	LX-94-03-00-0065	TSC-08-2, 8mm width, 2PIN connector of FPC and FPC
	LX-94-03-00-0066	Connector of 8mm width strip, dedicated FPC with wire , used with TSC-08-2 FPC-to-FPC connector

Dimensions

